

Is Now Part of



## **ON Semiconductor**®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor dates sheds, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor dates sheds and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use on similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor and its officers, employees, subsidiaries, affliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any lay bed ON Semiconductor and its officers, employees, ween if such claim alleges that ON Semiconductor was negligent regarding the d

#### February 2006

FDB8444 N-Channel PowerTrench<sup>®</sup> MOSFET

## FAIRCHILD

SEMICONDUCTOR®

## FDB8444

# N-Channel PowerTrench<sup>®</sup> MOSFET 40V, 70A, 5.5m $\Omega$


## Features


- Typ  $r_{DS(on)}$  = 3.9m $\Omega$  at  $V_{GS}$  = 10V,  $I_D$  = 70A
- Typ Q<sub>g(TOT)</sub> = 91nC at V<sub>GS</sub> = 10V
- Low Miller Charge
- Low Q<sub>rr</sub> Body Diode
- UIS Capability (Single Pulse and Repetitive Pulse)
- Qualified to AEC Q101
- RoHS Compliant

## Applications

- Automotive Engine Control
- Powertrain Management
- Solenoid and Motor Drivers
- Electronic Transmission
- Distributed Power Architecture and VRMs
- Primary Switch for 12V Systems







Absolute Maximum Ratings T <sub>C</sub> = 25°C unless otherwise noted					
Symbol	Parameter	Ratings	Units		
V <sub>DSS</sub>	Drain to Source Voltage	40	V		
V <sub>GS</sub>	Gate to Source Voltage	± 20	V		
	Drain Current Continuous (V <sub>GS</sub> = 10V) (Note	1) 70	Α		
D	Pulsed	Figure 4			
E <sub>AS</sub>	Single Pulse Avalanche Energy (Note	2) 307	mJ		
	Power Dissipation	167	W		
P <sub>D</sub>	Derate above 25°C	1.1	W/ºC		
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Temperature	-55 to +175	°C		

## **Thermal Characteristics**

$R_{\theta JC}$	Thermal Resistance, Junction to Case	0.9	°C/W
$R_{\thetaJA}$	Thermal Resistance, Junction to Ambient TO-263, lin <sup>2</sup> copper pad area	43	°C/W

## Package Marking and Ordering Information

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
FDB8444	FDB8444	TO-263AB	330mm	24mm	800 units

## **Electrical Characteristics** $T_J = 25^{\circ}C$ unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Тур	Max	Units
Off Char	acteristics					
B <sub>VDSS</sub>	Drain to Source Breakdown Voltage	$I_{D} = 250 \mu A, V_{GS} = 0V$	40	-	-	V
		1/ - 221/	-	_	1	Δ

1	Zero Gate Voltage Drain Current	$V_{DS} = 32V$		-	-	1	μA
DSS	Zero Gale Vollage Drain Current	$V_{GS} = 0V$	T <sub>J</sub> =150°C	-	-	250	
I <sub>GSS</sub>	Gate to Source Leakage Current	$V_{GS} = \pm 20V$		-	-	±100	nA

#### **On Characteristics**

V <sub>GS(th)</sub>	Gate to Source Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250 \mu A$	2	2.6	4	V
		I <sub>D</sub> = 70A, V <sub>GS</sub> = 10V	-	3.9	5.5	
r <sub>DS(on)</sub>	Drain to Source On Resistance	$I_D = 70A, V_{GS} = 10V, T_J = 175^{\circ}C$	-	7	9.9	mΩ

### **Dynamic Characteristics**

Ciss	Input Capacitance			-	6040	8035	рF
Coss	Output Capacitance		V <sub>DS</sub> = 25V, V <sub>GS</sub> = 0V, f = 1MHz		480	640	pF
C <sub>rss</sub>	Reverse Transfer Capacitance				290	435	pF
R <sub>G</sub>	Gate Resistance	f = 1MHz	f = 1MHz		2	-	Ω
Q <sub>g(TOT)</sub>	Total Gate Charge at 10V	V <sub>GS</sub> = 0 to 10V		-	91	128	nC
Q <sub>g(TH)</sub>	Threshold Gate Charge	$V_{GS} = 0$ to 2V	V <sub>DD</sub> =20V,	-	7	10	nC
Q <sub>gs</sub>	Gate to Source Gate Charge		I <sub>D</sub> = 70A,	-	23	-	nC
Q <sub>gs2</sub>	Gate Charge Threshold to Plateau			-	17	-	nC
Q <sub>gd</sub>	Gate to Drain "Miller" Charge			-	20	-	nC

Symbol	Parameter	Test Conditions	Min	Тур	Max	Units
Switching	g Characteristics					
t <sub>(on)</sub>	Turn-On Time		-	-	135	ns
t <sub>d(on)</sub>	Turn-On Delay Time		-	12	-	ns
t <sub>r</sub>	Turn-On Rise Time	$V_{DD} = 20V, I_D = 70A$ $V_{GS} = 10V, R_{GS} = 2\Omega$	-	78	-	ns
t <sub>d(off)</sub>	Turn-Off Delay Time		-	48	-	ns
t <sub>f</sub>	Turn-Off Fall Time		-	15	-	ns
t <sub>off</sub>	Turn-Off Time		-	-	95	ns
Drain-So	urce Diode Characteristics			1	I	
V <sub>SD</sub>	Source to Drain Diode Voltage	I <sub>SD</sub> = 70A	-	-	1.25	V
Source to Drain Didde Voltage	Source to Brain Blode Voltage	I <sub>SD</sub> = 35A	-	-	1.0	V

I<sub>F</sub> = 70A, di/dt = 100A/μs

I<sub>F</sub> = 70A, di/dt = 100A/μs

t<sub>rr</sub> Q<sub>rr</sub>

Reverse Recovery Time

Reverse Recovery Charge

Notes: 1: Maximum wire current carrying capacity is 70A. 2: Starting  $T_J = 25^{\circ}C$ , L = 0.2mH,  $I_{AS} = 56A$ .

This product has been designed to meet the extreme test conditions and environment demanded by the automotive industry. For a copy of the requirements, see AEC Q101 at: http://www.aecouncil.com/ All Fairchild Semiconductor products are manufactured, assembled and tested under ISO9000 and QS9000 quality systems certification.

62

82

ns


nC

-


-


-

-

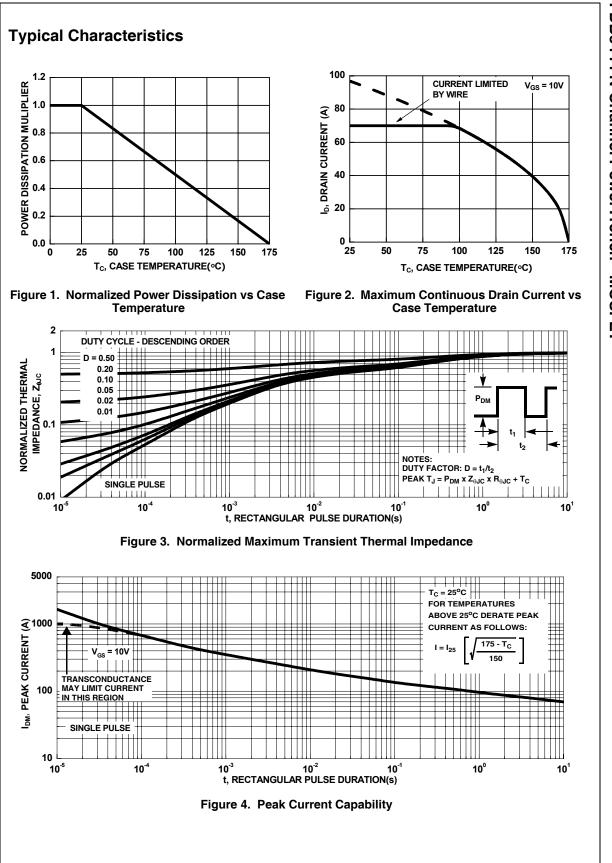

FDB8444 N-Channel PowerTrench<sup>®</sup> MOSFET

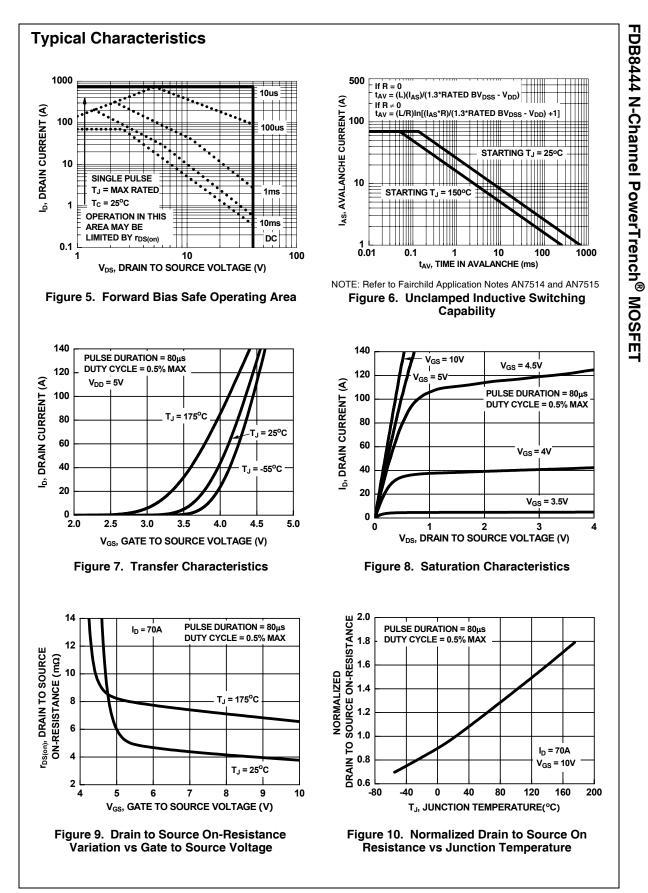

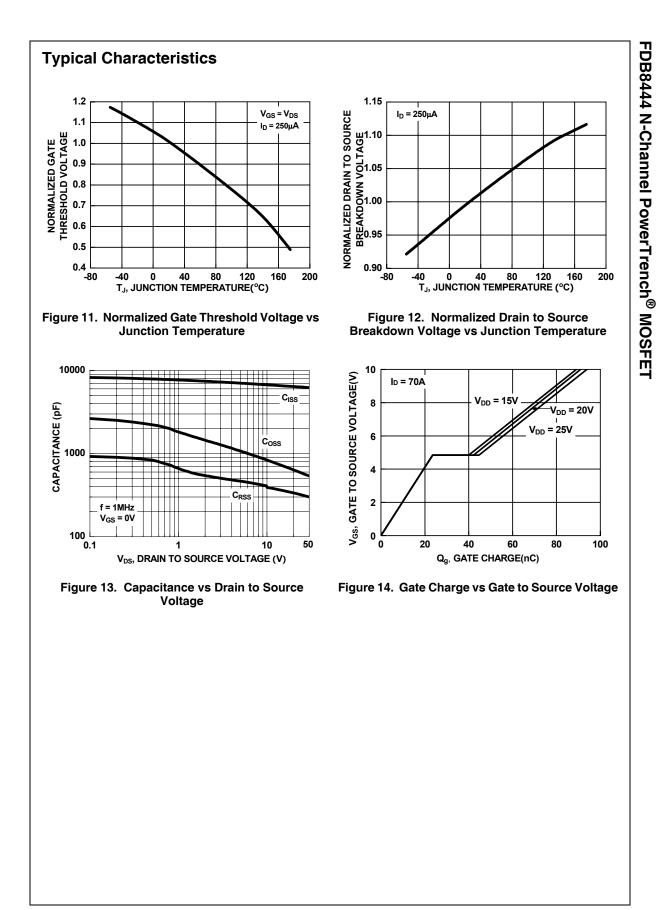

#### TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FAST <sup>®</sup>	ISOPLANAR™	PowerSaver™	SuperSOT™-6
ActiveArray™	FASTr™	LittleFET™	PowerTrench <sup>®</sup>	SuperSOT™-8
Bottomless™	FPS™	MICROCOUPLER™	QFET <sup>®</sup>	SyncFET™
Build it Now™	FRFET™	MicroFET™	QS™	TCM™
CoolFET™	GlobalOptoisolator™	MicroPak™	QT Optoelectronics™	TinyLogic <sup>®</sup>
CROSSVOLT™	GTO™	MICROWIRE™	Quiet Series™	TINYOPTO™
DOME™	HiSeC™	MSX™	RapidConfigure™	TruTranslation™
EcoSPARK™	l <sup>2</sup> C™	MSXPro™	RapidConnect™	UHC™
E <sup>2</sup> CMOS™	i-Lo™	OCX™	µSerDes™	UltraFET®
EnSigna™	ImpliedDisconnect <sup>™</sup>	OCXPro™	ScalarPump™	UniFET™
FACT™	IntelliMAX™	OPTOLOGIC <sup>®</sup>	SILENT SWITCHER <sup>®</sup>	VCX™
FACT Quiet Series™		OPTOPLANAR™	SMART START™	Wire™
		PACMAN™	SPM™	
Across the board. Aro	und the world.™	POP™	Stealth™	
The Power Franchise	B	Power247™	SuperFET™	
Programmable Active	Droop™	PowerEdge™	SuperSOT™-3	

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

#### PRODUCT STATUS DEFINITIONS Definition of Terms

Rev. 118

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC